



4 x 4






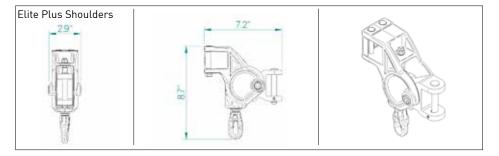

Wall covering diagram



Ceiling covering diagram

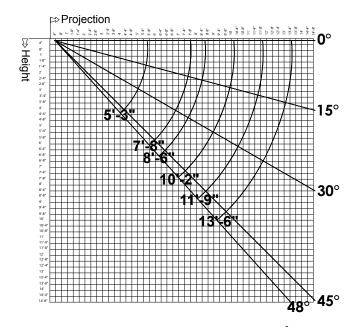

Note: Awning may not hang exactly at 0 $^\circ$ due to the weight of the front bar.

ELITE PLUS 59

PRODUCT NOTES

- Widths available: 3'8" 46'
- Projections available: 5'3", 7'8", 8'6", 10'2", 11'9", 13'6"
- Arm style: belt arms on all widths and projections
- Operation: motor and manual option. (Manual option for units up to 21' only)
- Mounting options: roof, soffit, and wall. (R-Pitch not recommened for roof mount option)
- Wind ratings: Class Rating 2
- *Hood option is recommended to help prevent water damage to motor which is not covered under warranty guidelines plus protect the fabric when the awning is retracted.
- Hoods over 23' width will be spliced
- Drop valance available up to 24' width and 11' 9" projection
- Custom color available on all units
- Prices and motor options are influenced by the number of arms on retractable awnings
- Manual option for units up to 21' only
- Split Roller Units: Units over 16' requires a center support, but many dealers opt for a split roller coupling instead because fabric damage caused by a center support is not covered by the KE Warranty. A split roller coupling supports the roller tube and eliminates the need for a center support.
- All units over 26' on width specification have limited shipping options due to final packaging size with additional parts required for awning units enclosed in the box. The standard common carrier restriction for normal shipping rates on pup trailers is based on a maximum 27' length that restricts single frame orders to 26' widths. All other orders will require either special freight quotations or spliced frame systems for order configuration. Please call customer service for any questions or clarification necessary.
- Arms with LED lights available with transformer (included) and 24V DC Receiver (optional).

AVAILABLE COLORS






BROWN

(Bronze)

SAND



CHARCOAL

JET BLACK RAL 9005 High Gloss