



Wall covering diagram

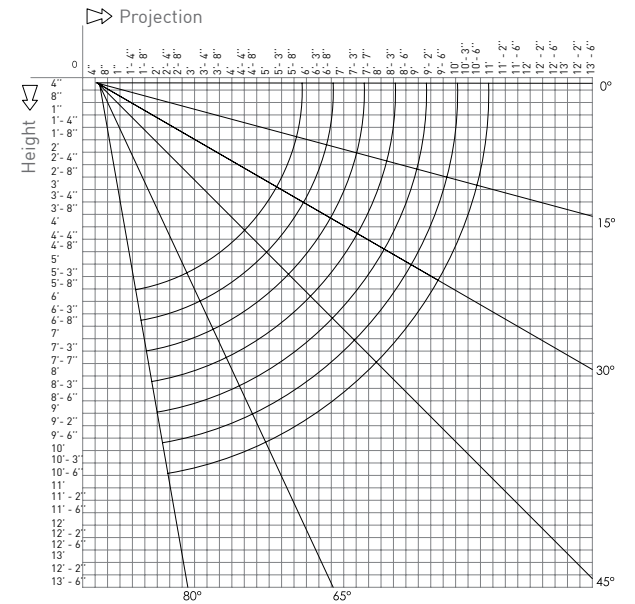

Ceiling covering diagram

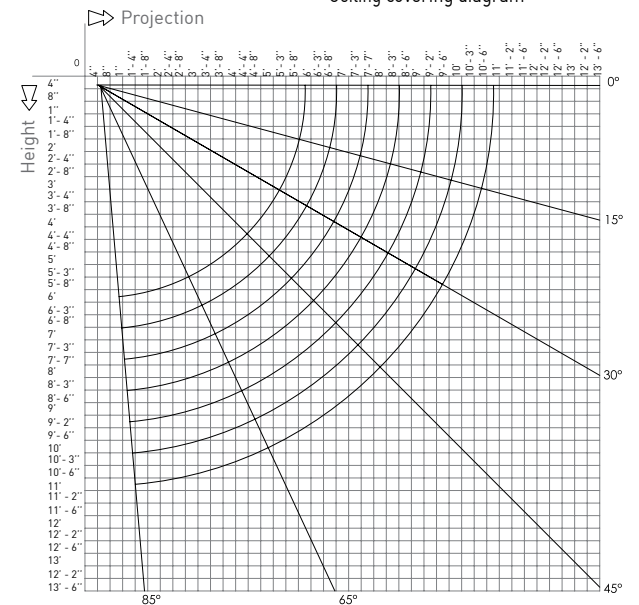


Note: Awning may not hang exactly at 0° due to the weight of the front bar.

## PRODUCT NOTES

- Widths available: 6'5" - 20' (projections up to 10' 2"), 7' - 16' (projections up to 11' 9")
- Projections: 5' 3", 7' 8", 8' 6", 10' 2", 11' 9"
- Arm style: belt arms on all widths and projections
- Operation: motor and manual option
- Mounting options: roof, soffit, and wall
- Recommended method of installation is with a header board or extended bracket.
- Roof installation available only with a header board.
- Wind ratings: Class 1
- Drop valance and valance option are not available.
- 10:1 gear, Somfy and Moon motors.
- No custom color available.
- Awning is strictly for shade, no PVC fabric available.
- Pitch adjustment: Wall installation 5° - 80°, soffit 5° - 85°.
- Additional 32" brackets needed if the end of the awning is located between two studs.
- Awning is not available with a cross arm option, see minimum size table on page 46.
- Arms with LED lights available with transformer (included) and 24V DC Receiver (optional).

\*\* For complete unit notes, specifications, and installation instructions,  
please see the Product Reference Guide \*\*

## AVAILABLE COLORS



WHITE  
(RAL 9010)



BROWN  
(Bronze)



SAND



CHARCOAL



JET BLACK  
RAL 9005  
High Gloss