



PINNACLE TWO

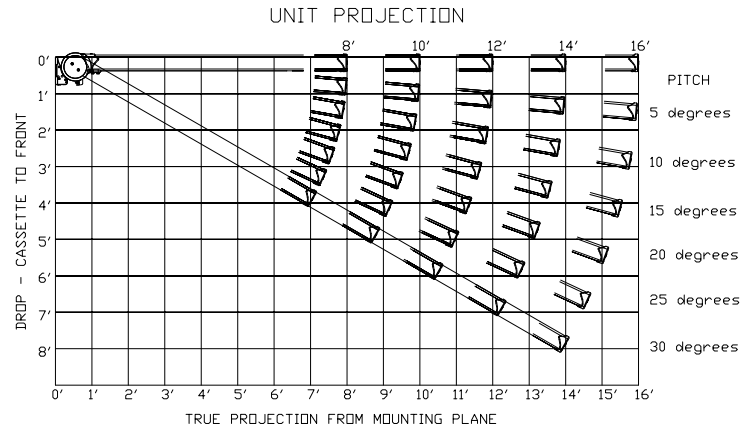

PINNACLE ONE

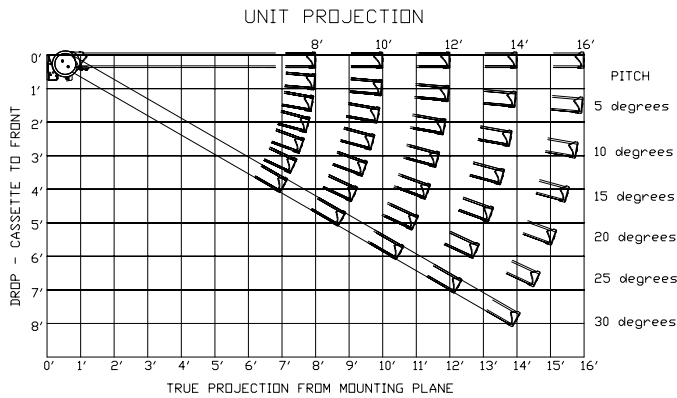

PINNACLE TWO

PRODUCT NOTES

- Widths available: 3' - 16', in ¼" increments, can be joined up to 3 modules, up to 48' width
- Projections available: 3' - 16', in ¼" increments
- Use of a wind breaker bar is mandatory on projections over 10'
- Operation: motorized only
- Unit can be mounted on a sloping surface (i.e. a pitched roof)
- Mounting options: on top of existing structure
- Wind ratings: Class 1
- The Pinnacle projection is measured from the top of the cassette to the bottom of the side rails, the width is measured from the cassette end cap to end cap.
- The seams for acrylic fabric will run with the projection, like a lateral arm awning, that being said, seam placement cannot be chosen.

PINNACLE ONE

PRODUCT NOTES

- Unit width is 3' to 16' in ¼" increments can be joined up to three modules up to 48' width.
- Unit projection is 3' to 16' in ¼" increments on all fabrics
- Use of a windbreaker bar is mandatory on projections over 10'.
- Operation: motorized only.
- Mounting options: unit can be mounted level or pitched up to about 30 degrees.
- The Pinnacle is measured from the head box to the end caps of the projection extrusion, the width is measured from the head box end cap to end cap.
- The seams for acrylic fabric will run with the projection, like a lateral arm awning, that being said, seam placement cannot be chosen.
- For pricing use Pinnacle Two grid and add wall brackets and front post pricing

AVAILABLE COLORS FOR PINNACLE TWO/ONE



WHITE
RAL 9010



CHARCOAL



SAND



BROWN
(Bronze)